



CRYSTORAMA LIGHTING

ASSEMBLY INSTRUCTION MODEL #4412-CH-CL-MWP



Crystorama.com

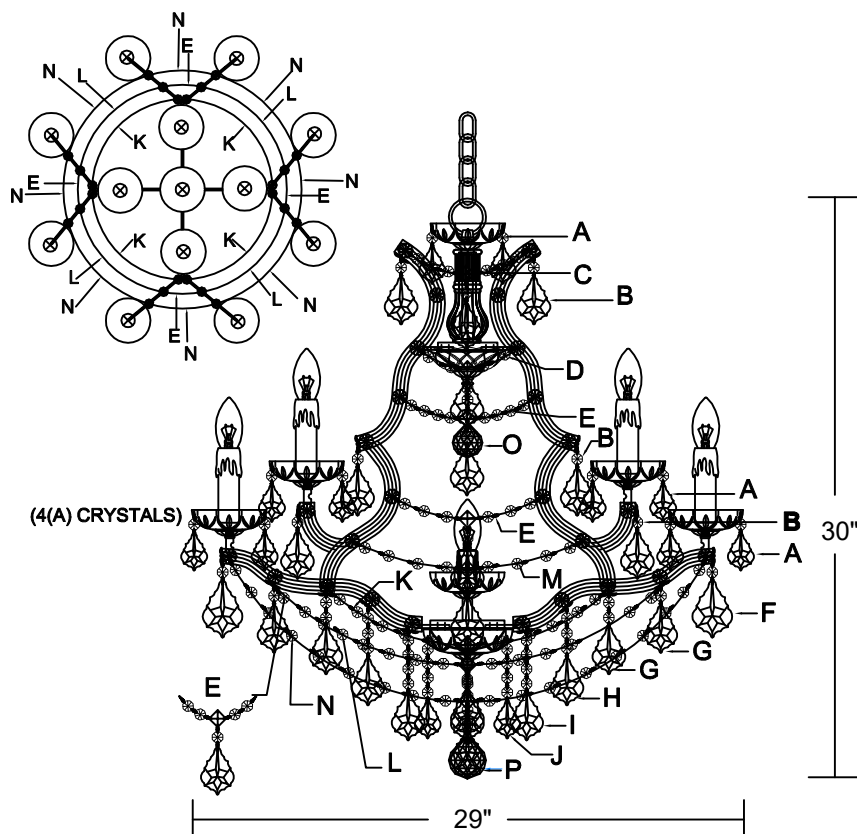

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 13-Candelabra Base Bulb

40 Watts Recommended 60 Watts Max

USE LED BULBS FOR EXTENDED USE

The fixture is dry rated

DETAILED ILLUSTRATION

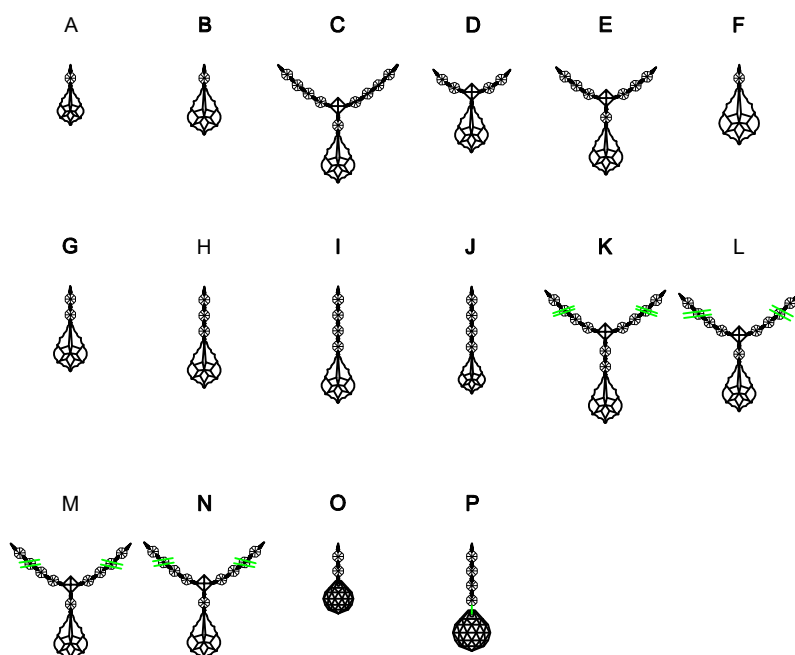

How to Install

1. Do a complete inventory of all parts and components before you start installing.
2. Attach each of the arms to the metal plates, using enclosed screws.
3. Use the wire connector to connect the main wire, lead wire and socket wires.
4. Using the bottom thread, apply the metal dish, nut, glass dish and small metal dish in that order. Secure all by tightening with the finial.
5. Screw the column kit on the coupling.
6. After safely attaching fixture into outlet box, install bobeches, bulbs (not included) and proceed to connecting the power.
7. When you begin to dress the fixture, start with packet labeled (A).
8. IMPORTANT: Apply crystal sets in alphabetical order.

Crystal Sets

- A. 52Sets. (1)14mm + AS20-2"
- B. 12Sets. (1)14mm + AS20-2.5"
- C. 4Sets. (9)14mm + (1)16mm Square + AS20-2.5"
- D. 4Sets. (4)14mm + (1)16mm Square + AS20-2.5"
- E. 12Sets. (7)14mm + (1)16mm Square + AS20-2.5"
- F. 8Sets. (1)14mm + AS20-3"
- G. 12Sets. (2)14mm + AS20-2.5"
- H. 4Sets. (3)14mm + AS20-2.5"
- I. 4Sets. (4)14mm + AS20-2.5"
- J. 4Sets. (4)14mm + AS20-2"
- K. 4Sets. (14)14mm + (1)16mm Square AS20-2.5"
- L. 4Sets. (13)14mm + (1)16mm Square + AS20-2.5"
- M. 4Sets. (11)14mm + (1)16mm Square + AS20-2.5"
- N. 8Sets. (11)14mm + (1)16mm Square + AS20-3"
- O. 1Piece (2)14mm + AS8-40mm Ball
- P. 1Piece (4)14mm + AS8-50mm Ball

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA LIGHTING



PART NUMBER MODEL #4412-CH-CL-MWP

Part Number

Part Numbers

- A. (10)-Wire Connector
- B. (1)-Mounting Plate
- C. (2)-Outlet Box Screws
- D. (1)-Lock Washer
- E. (1)-Hex Nut
- F. (1)-Nipple
- G. (1)-Canopy; w5" x h1" (XFB4405CHCAN5IN)
- H. (1)-Collar Ring
- I. (1)-Collar Loop
- J. (1)Chain; 72", 4.5mm (XFB4418CHCHA4.5MM)
- K. (1)-Ground Wire
- L. (1)-Column
- M. (1)-Coupling
- N. (1)-Metal Cover
- O. (16)-Screws
- P. (1)-Metal Plates
- Q. (1)-Thread
- R. (1)-Metal Dish
- S. (2)-Nut
- T. (1)-Glass Dish; Ø5", 11mm hole (XFB4424DIBOB5IN)
- U. (2)-Metal Dish
- V. (2)-Finial (XFB4418CHFIN)
- W. (1)-Metal Cover
- X. (1)-Metal Plates
- Y. (1)-Thread
- Z. (1)-Glass Dish; Ø5", 17mm hole, 4pin (XFB4412CHDIBOB5IN)
- AA. (1)-Metal Dish
- BB. (4)-Arms
- CC. (1)-Candle Sleeve; h2" (XFB4409CDL2IN)
- DD. (1)-Bobèche; Ø4", 26mm hole (XFB4405BOB4IN)
- EE. (12)-Candle Sleeve; h4" (XFB4418CDL4IN)
- FF. (12)-Bobèche; Ø4", 26mm hole, 4pin (XFB4405CHBOB4IN)
- GG. ()-Rosette

PART BAG I : Includes Parts A, C

PART BAG II : Includes Parts B, D, E, F, H, I

PART BAG III: Includes Parts M, N, O, P, Q, R, S, U, V, L

PART BAG IV: Includes Parts W, O, X, Y, AA, S, U, V

PART BAG V : Includes Parts EE, CC

PART BAG VI: Includes Parts FF, DD

