


## Drawing 1 - Lamp Installation

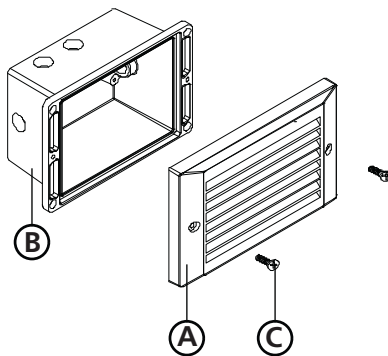

### WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamps get hot quickly! Contact only switch/plug when turning on.
3. Do not touch hot lens, guard or enclosure.
4. Keep lamp away from material that may burn.
5. Do not operate luminaire fitting with a missing or damaged cover.

1

1. Find a clear area in which you can work.
2. Carefully review instructions prior to assembly.
3. Gather tools required : **WIRE STRIPPERS, PHILIPS HEAD SCREWDRIVER, SILICONE GREASE, THREAD SEALANT.**
  - Save these instructions for future reference.

**WARNING: LUMINAIRE MUST BE INSTALLED AND GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) AND LOCAL CODES. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY AND/ OR DAMAGE TO THE LUMINAIRE. FOR ANY SPECIAL APPLICATIONS NOT COVERED, PLEASE CONTACT HINKLEY LIGHTING FOR ASSISTANCE**

**FIXTURES WHICH MAY COME IN CONTACT WITH OR BE EXPOSED TO MOISTURE (I.E. OUTDOORS) SHALL BE INSTALLED ON A GFI (GROUND FAULT INTERRUPTOR) POTECTED CIRCUIT.**

**ALWAYS USE UL RECOGNIZED WIRE CONNECTORS FOR CONNECTIONS.**

2

1. Please refer to the **mounting instructions** located on the back of this sheet to continue installation of this fixture.

3

## lamp installation | replacement

1. To prevent electrical shock, disconnect from the electrical supply before servicing.
2. Remove face plate (A) from housing (B) by loosening 2 philips screws on front of louver (C) - see **Drawing 1**.
3. Replace lamp with correct wattage and type marked on fixture label.  
CAUTION: DO NOT EXCEED MAXIMUM WATTAGE MARKED ON LUMINAIRE LABEL.

Info 58025 BZ: Lamp Type G9, Maximum Wattage is 25 watts per bulb.


Info 58009 BZ: Lamp Type G23-2, Maximum Wattage is 9 watts CFL per bulb.



# mounting instructions

Family: 120V Series Step Light | Item No. 58025/58009 BZ

**Drawing 2 - Fixture Mounting**

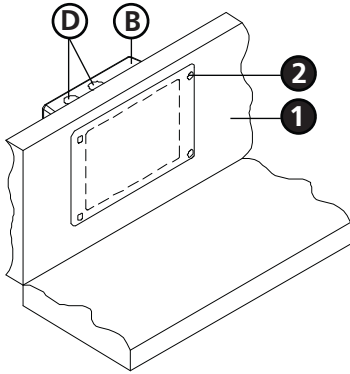

**1**

1. Level Supplied template **(D)** - see **Drawing 3** - on desired step area **(1)** and drill four diameter clearance holes **(2)** - see **Drawing 2**. Failure to level will cause fixture to have a tilted appearance.
2. Remove the 1/2" PT plugs **(E)** from the side and bottom of the housing **(B)** and pull the supply wires through the holes and into the housing **(B)**.
3. Be sure all unused electrical plugs have been relaced. Using template **(D)**, cut placement hole into desired step area **(1)**.
4. Secure housing to desired step area **(1)** with four 8-32 x 1 3/4" wood screws **(3)** not provided to housing **(B)**.
5. Please refer back to the front of this sheet to install lamp and complete the installation of this fixture.

**Drawing 3 - Template**

