




PRODUCT NAME: Eternity
ITEM NUMBER: 39779-BCPC

Please consult your electrician for hanging fixture and wiring

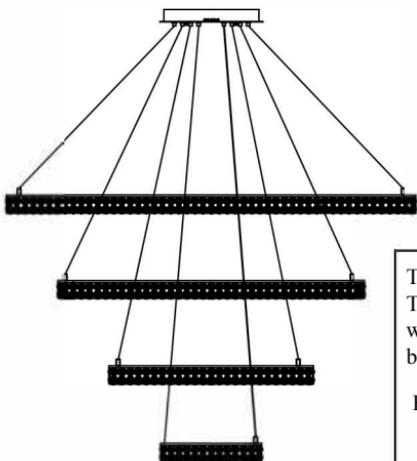

The fixture is designed to Dim With a standard Triac forward phase dimmer. Dimming levels will vary by dimmer. The above belongs in a box with recommended drivers

Below is a list of recommended dimmers

- Lutron MACL-153M
- Lutron DVL-153P
- Lutron SCL-153P
- Leviton IPL06-10Z
- Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product a 600 watt dimmer.

WARNING: Wires need to be connected to driver in canopy and should not be connected directly to power source or a short may occur

119W LED

IMPORTANT: Turn off power at the main fuse or circuit breaker box before starting installation



(A)
**Mounting
Bracket**



(B)
Anchor Bolts




(C)
Canopy




(D)
Finial

Locate all hardware & components before discarding packaging

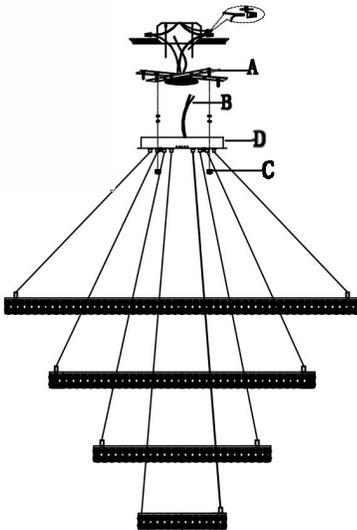


1.)




Step 1: Remove mounting bracket (A) and install to electrical box. Mark where anchors (B) meet ceiling, remove mounting bracket from ceiling, and then drill holes using 3/16" drill bit where marked (B). install and attach anchors to secure bracket at ends

2.)

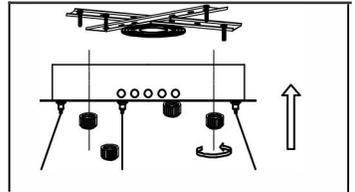

Step 2: Adjust wire to the desired mounting height. (If cutting wire is necessary see instructions 2a on page 3). Secure fixture to ceiling using finials (D) provided.

3.)

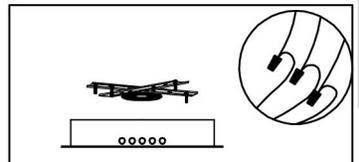


Step 3: Wire fixture to wire in outlet box. Black is live, White is neutral and Copper is ground.

Cleaning & Care:
Clean with a soft and a mild Detergent.
Do not use Abrasive cleaner

STEP 2a.

If wire was cut while adjusting the height, please note the wire consist of an outer mesh (-) and inner wire (+). Strip wire to expose inner wires(+), then separate mesh (-) from inner wire (+).

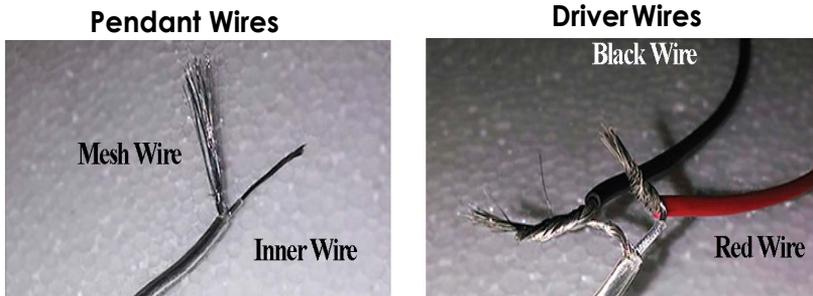


Pendant	Driver
InnerWire (+)	DriverRed (+)
OuterMesh (-)	DriverBlack (-)

This fixture comes with **3 drivers** (1x)700mA, (2x)900mA. The 700mA driver supplies power to the smallest rings (30" & 40"). One 900mA driver per large ring (50", 60"). (See diagram below)

2b.


Smaller Rings (to 700mA driver)

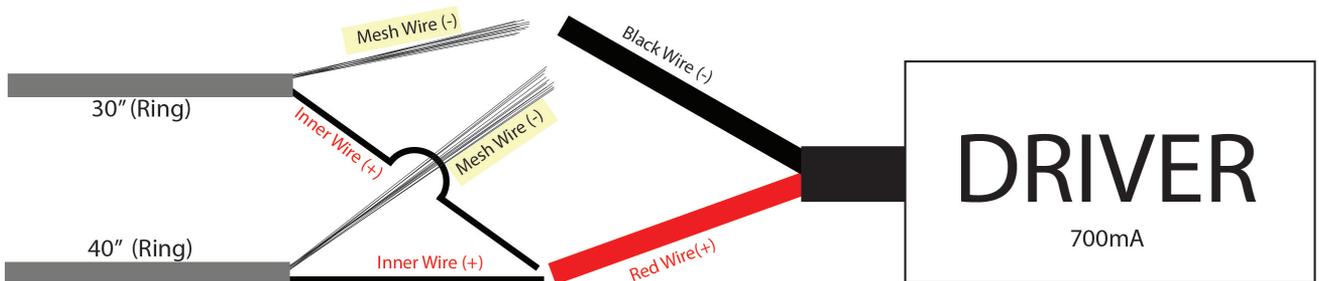

1. Connect both **MESH** (-) wires from each ring together. Then, connect **MESH** wires to the Black wire.
2. After, connect both **INNER** (+) wires together. Then, connect **INNER**(+) wires to the **Red** wire

2c.

Large Rings (to 900mA driver)

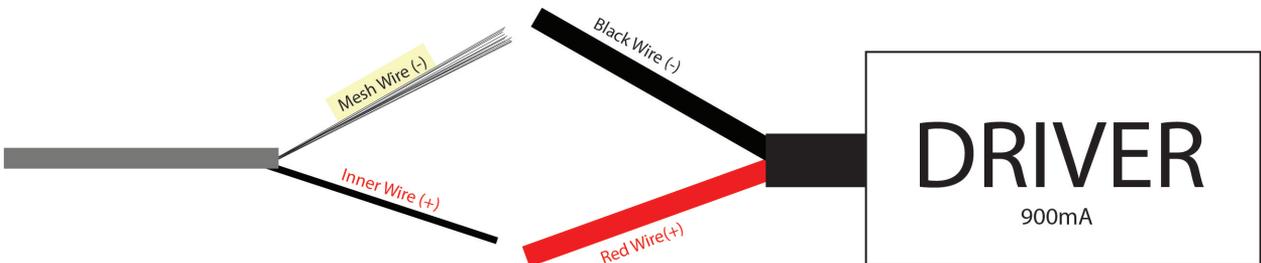

1. Connect **MESH** (-) wire from 50" ring to Black wire (-). Then the inner(+) wire from the fixture to the **Red** wire (+)
2. Repeat the same step for 60" ring to the additional 900mA diver.