

Pablo®

BEL OCCHIO

ASSEMBLY & INSTALLATION INSTRUCTIONS

INFO@PABLODESIGNS.COM
888 MARIN STREET
SAN FRANCISCO, CA
94124

PABLODESIGNS.COM



APPROVED COMPONENTS

BEL OCCHIO

1. LOOSEN STRAIN RELIEF CAP AND FEED CORD THROUGH
2. TIGHTEN STRAIN RELIEF AT DESIRED HEIGHT AND ATTACH MOUNTING PLATE TO JUNCTION BOX
3. CUT CORD AND CONNECT LAMP WIRING TO BUILDING WIRING
4. SLIDE COVER UP TO CEILING AND SECURE WITH NUT

BULB TYPE


1X 75W WHITE BT - 15 MEDIUM BASE HALOGEN

CARE INSTRUCTIONS




WIPE CLEAN WITH A SOFT DAMP CLOTH.
AVOID AMMONIA-BASED CLEANERS.



6" (152MM)
RECOMMENDED
FOR CONNECTION




**IMPORTANT: WE RECOMMEND CEILING MOUNTING
BE INSTALLED BY AN ELECTRICIAN**

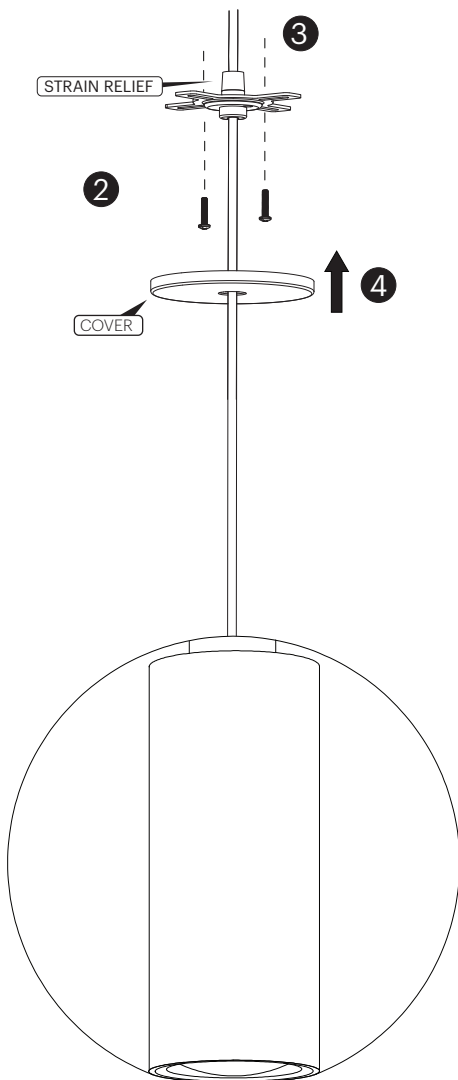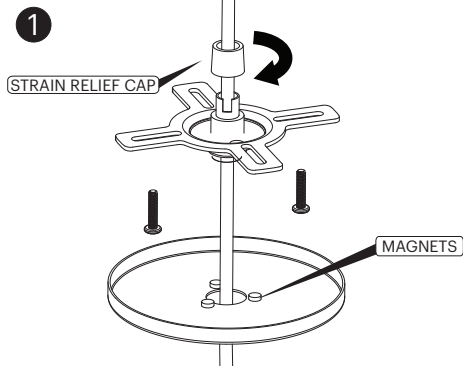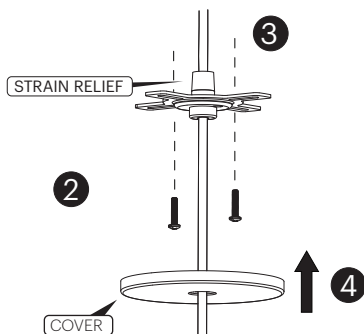


BEL OCCHIO

- 1 PLACE BEL OCCHIO GLOBE ON
BASE WITH CORD EXIT FACING UP

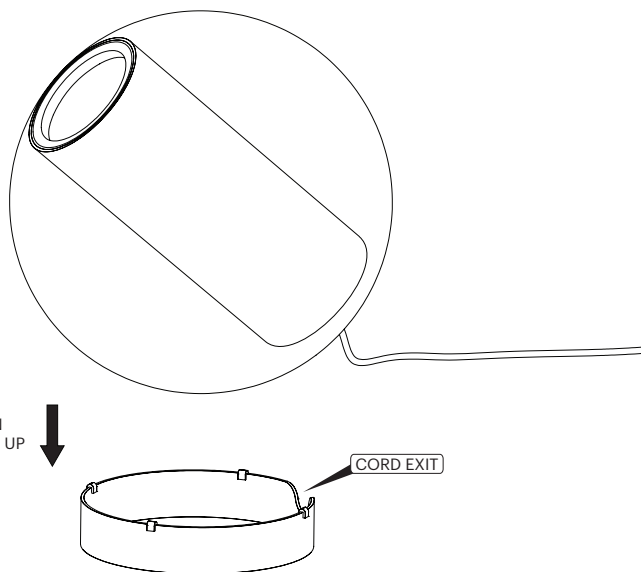

ADJUSTMENT

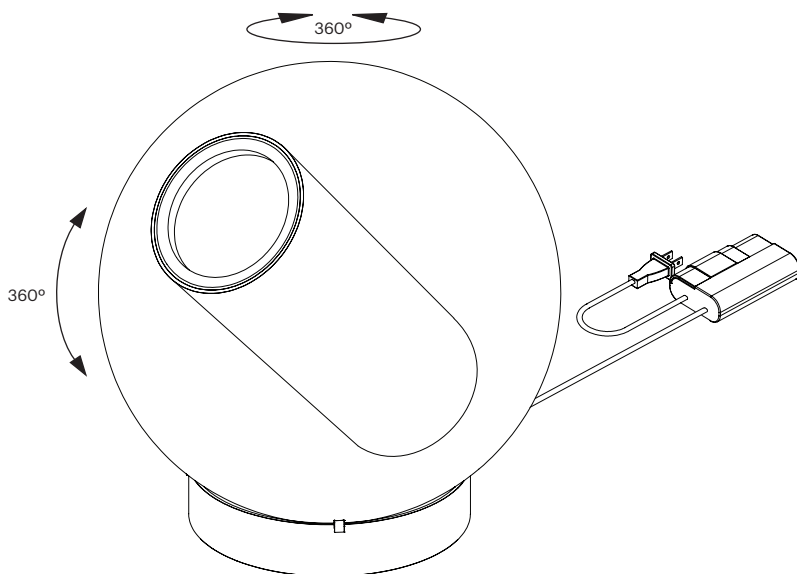

BEL OCCHIO

- 1** FOR SUSPENSION MODEL ONLY,
SLIDE METAL TABS TOGETHER AS SHOWN

