

The Strut LED path exemplifies the epitome of a modern, minimalist aesthetic. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. Also available as a matching 42" bollard. Ideal for outdoor path and campus illumination.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:


- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Bolt or Stake mounting options

SPECIFICATIONS

DELIVERED LUMENS	693
WATTS	15
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.

* Visit techlighting.com for specific warranty limitations and details.

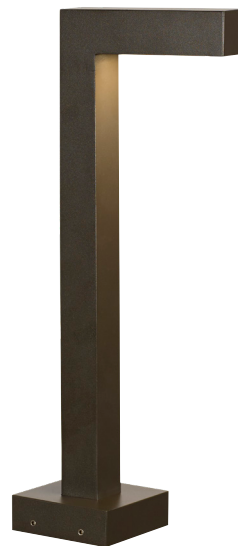

STRUT PATH
shown in bronze



STRUT PATH
shown in charcoal

12V AC TRANSFORMERS*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

ORDERING INFORMATION

700OASTR	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	927 90 CRI, 2700K	18 18"	D DIFFUSE	Z BRONZE	12 12V*	S SYMMETRIC	CONCRETE MOUNT
	930 90 CRI, 3000K			H CHARCOAL			ST STAKE MOUNTING KIT
				B BLACK			

*12V TRANSFORMER ORDERED SEPARATELY.




Strut Path

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

STRUT PATH

Total Lumen Output: 693
 Total Power: 14.6
 Luminaire Efficacy: 47
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B0-U1-G0

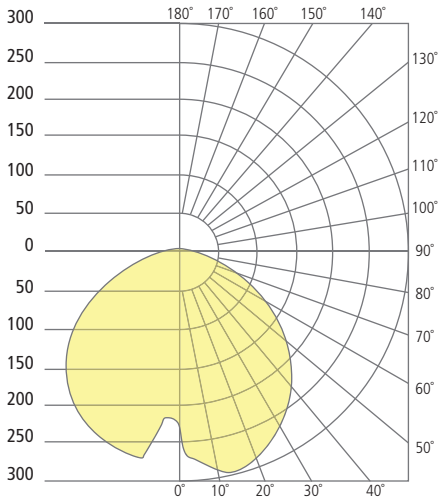

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES